


FER Series

TWO
WAY

HIGH

Performance
Multi Purpose
Speaker System

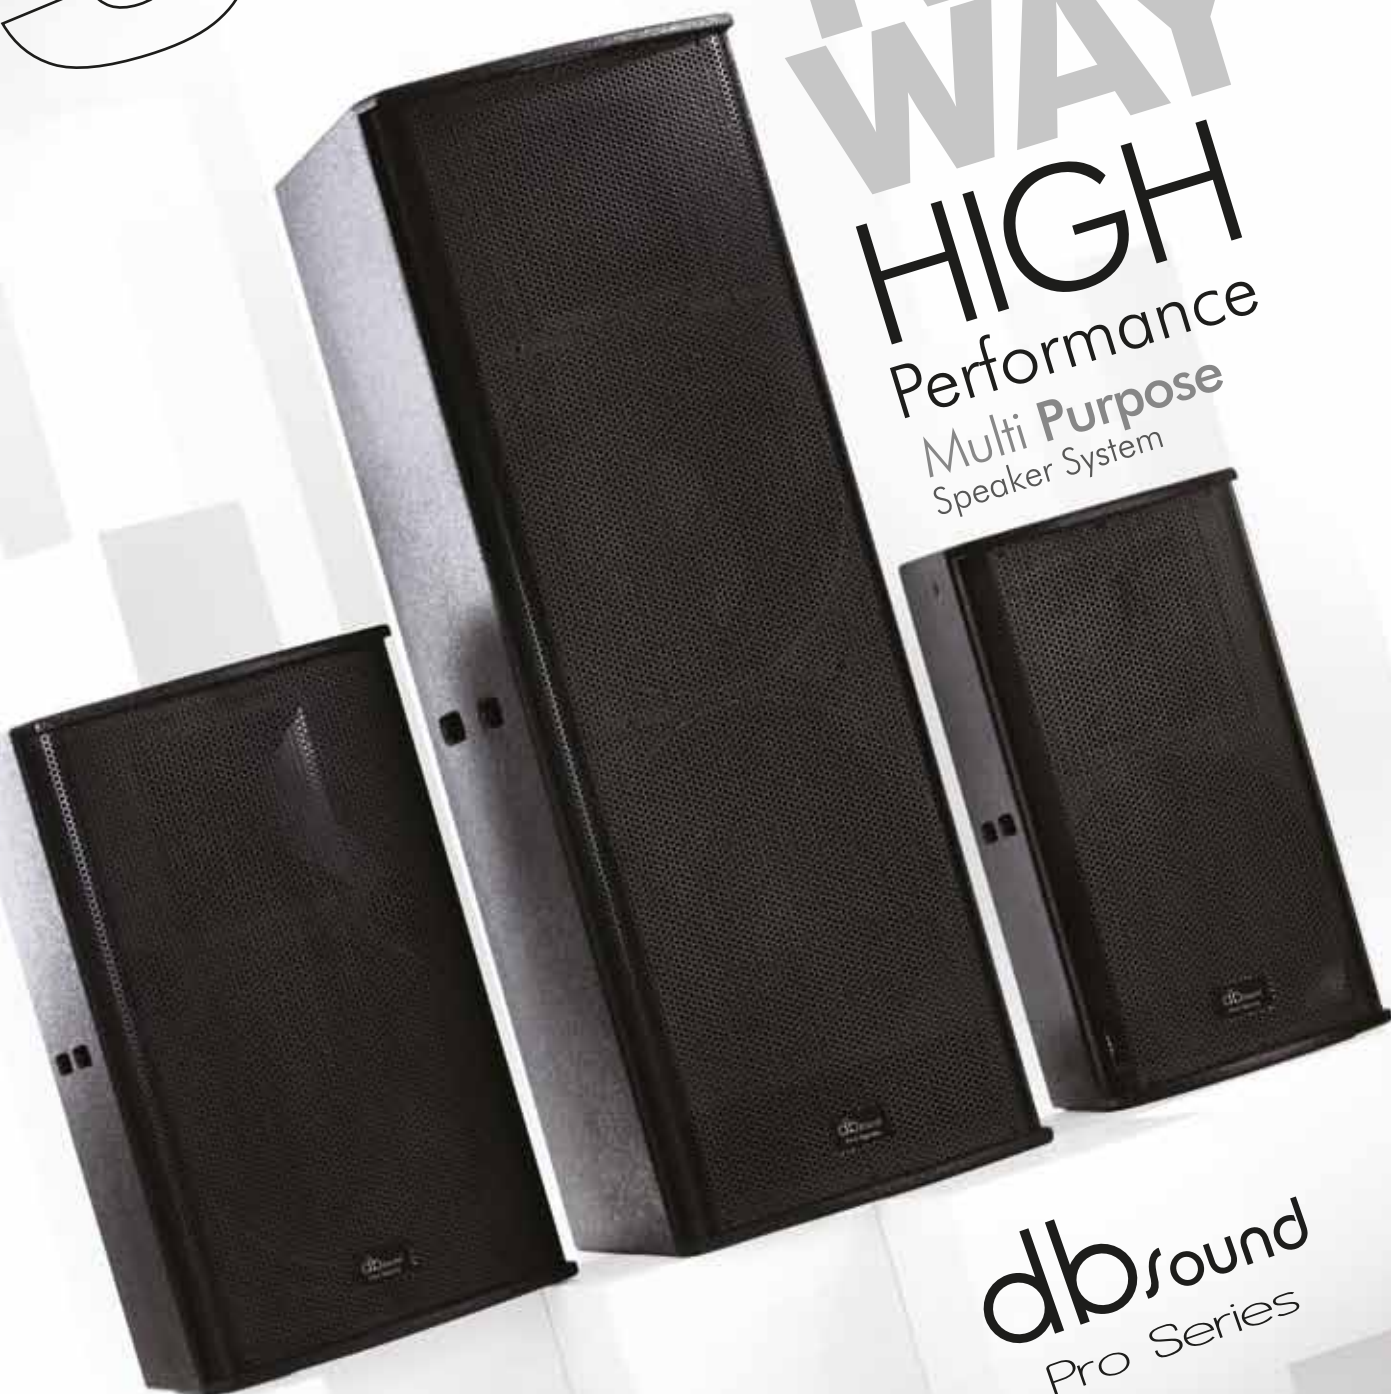

db sound
Pro Series

db sound

Pro Series



FR SERIES is a full range two way high performance multipurpose systems suitable for small/medium/large PA Applications. This series comes in three models


- FR12B1 / B2
- FR15B1 / B2
- FR215

Loaded with high power Beyma Woofer and 1.4" Driver delivers clear and rich frequency response with high SPL. Enclosures are constructed with Birch Plywood and finished with high quality textured paint. The front is protected by CNC Machined steel perforated grille.


Features:

- Compact & Powerful System
- New Rotable 80° x 50° horn design
- Full range passive operation
- Built with world class Beyma® Loudspeakers
- Pole Mountable for Mobile Applications


FR 12B2 / FR 15B2



FR 12B1 / FR 15B1



FR 215

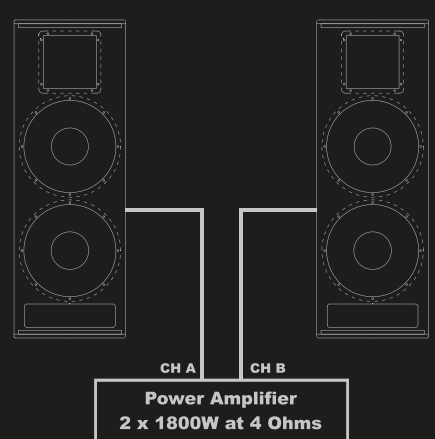

Applications:

- Stage monitors in Live Performance
- Mobile DJ's
- Acoustic Music & Vocal
- Speech Reinforcement
- Corporate A/V
- Auditoriums
- Theme parks

Specifications	FR12B1	FR12B2	FR15B1	FR15B2	FR215
Power (AES)	600W	450W	800W	600W	1400W
Program Power (AES)	1200W	900W	1600W	1200W	2800W
LF Driver	12" Woofer, 3" Coil	12" Woofer, 3" Coil	15" Woofer, 4" Coil	15" Woofer, 4" Coil	2 x 15" Woofer, 4" Coil
HF Driver	1.4" Throat, 3" Coil	1.4" Throat, 1.75" Coil	1.4" Throat, 3" Coil	1.4" Throat, 1.75" Coil	1.4" Throat, 3" Coil
Max. SPL Continuous	124 dB	122 dB	125 dB	120 dB	128 dB
Max. SPL Peak	130 dB	128 dB	131 dB	126 dB	134 dB
Frequency Response	45Hz - 20KHz	35Hz - 20KHz	25Hz - 20KHz	30Hz - 20KHz	40Hz - 20KHz
Dispersion Angle	80° x 50°	80° x 50°	80° x 50°	80° x 50°	80° x 50°
Connectors (In/Out)	2 x Neutrik Speakon®	2 x Neutrik Speakon®	2 x Neutrik Speakon®	2 x Neutrik Speakon®	2 x Neutrik Speakon®
W x H x D	350 x 625 x 376 mm	350 x 625 x 376 mm	431 x 705 x 446 mm	431 x 705 x 446 mm	431 x 1225 x 495 mm
Weight	22 Kg	19 Kg	39 Kg	37 Kg	52 Kg